



# CABLE DRUM SPREADER BARS

## SPREADER BARS





Autoguide’s Cable Drum Lifting and Handling Solution—designed for safety, efficiency, and versatility in cable drum lifting and cable laying operations. The light weight bar allows easy assembly through the drum centre, while all other parts are lifted into place with plant, minimising manual handling.

A straightforward pin-in-position coupler with adjustable settings securely holds the drum on the bar, allowing for smooth and controlled rotation during cable deployment.

Available in three standard units, this solution accommodates a wide range of cable drum sizes, making it an ideal choice for diverse handling needs.

The drum bar’s adjustable cone positions allow it to hold various drum widths. It can support up to 8t at the widest setting, with reduced capacity as the cones move toward the centre.

The example below shows the maximum load for each hole on an 8t Spreader Bar.

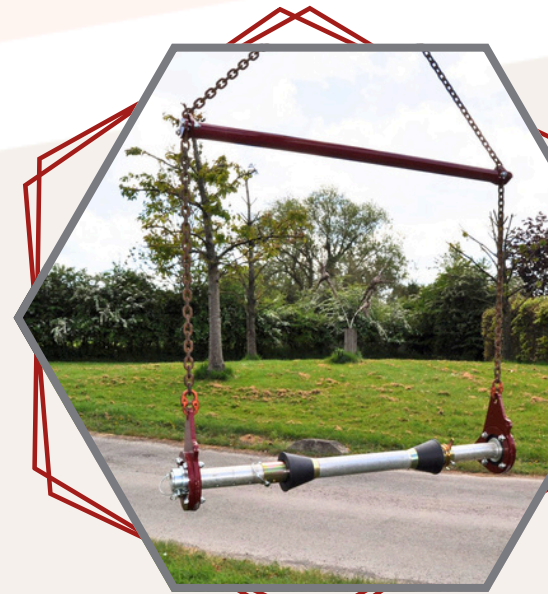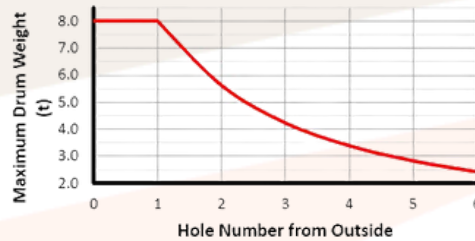

## SPECIFICATIONS

Product Code	Description	Max Capacity (kg)	Max Drum Width (mm)	Max Drum Diameter (mm)	Min Drum Hole Size (mm)	Bar Weight (kg)
55943	Cable Drum Spreader Bar 76/2.4	8000	2000	3000	80	44
53518	Cable Drum Spreader Bar 76/2	5000	1700	2600	80	23
53517	Cable Drum Spreader Bar 50/1.5	2500	1200	2300	55	8

Autoguide Equipment Ltd,  
Stockley Rd, Heddington, Calne, SN11 0PS

+44(0)1380 850885  
sales@autoguide.co.uk

© Autoguide 2025. In common with other manufacturers we reserve the right to modify or change specification without prior notice and without commitments to change units in the field. E&EO. AG002 1.1

